




Laserliner®

AutoCross-Laser 360° PowerBright



Super-bright crossline laser with a 360° horizontal laser line and slope function.

Rev.0210

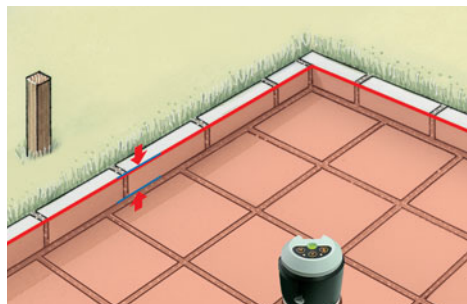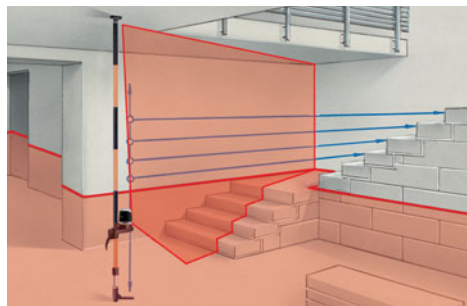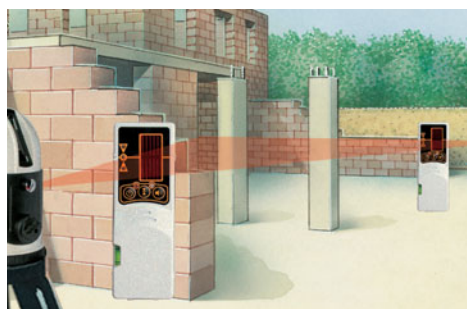

- **PowerBright-Laser:** Special high power diodes produce laser lines double as bright as usual.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- 3 line lasers produce a continuous horizontal **360° laser line**, 1 **vertical line**.
- The housing with **removable device base** and **low lying laser modules** is ideal when working close to ground level.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 50 m radius – ideal for all interior and exterior applications.
- **Individually switchable** laser lines.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Additional slope function** to align angled surfaces.
- Straightforward positioning of the vertical laser line thanks to **rotatable device base**.
- **Illuminated vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

TECHNICAL DATA

ACCURACY 2 mm per 10 m
SELF-LEVELLING RANGE ± 2,5°
LEVELLING automatic
LASER RECEPTION RANGE (optional) max. 50 m radius
LASER WAVELENGTH 635 nm
LASER line lasers, class 2M, < 5 mW
POWER SUPPLY batteries
WEIGHT 0.85 kg
DIMENSIONS 110 x 190 x 115 mm (WxHxD)



Article-No: 049.012A

EAN-Code: 4 021563 668427

AutoCross-Laser 360° PowerBright

including carrying case
+ removable device base
+ tripod adapter
+ laser enhancement glasses
+ SpeedPowerPack incl. rechargeable batteries (NiMH)

PU 1

Article-No: 049.011A

EAN-Code: 4 021563 668410


AutoCross-Laser 360° PowerBright RX

Set content like above without laser enh. glasses with RangeXtender RX
+ universal mount
+ battery


PU 1



Optimized for working close to ground level




Illuminated vial for pre-adjustment



High-quality external Quick-Charger

3H 1V



OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Telescopic Stand Basic, 330 cm	090.120A	4 021563 650637	1